


ELEVATOR TRAVELLING CABLES




4 -1 5 -2 -3 6



CCTV CABLES 4 X 1.5MM² + 8 X 2 X 0.5MM² + 2 X RG59 (75 OHM)

Construction


- 4 x 1.50 mm² stranded bare copper 1.50 mm² (30x0.25 ϕ), PVC insulated, 3.00 mm ϕ black with white numbers
- 8x2x0.50 mm² stranded bare copper 0.5mm² (16x0.20 ϕ), PVC insulated, 1.75 mm ϕ black with white numbers
- 2 x coaxial cables RG 59, 75 Ω , 5.0 mm
- Steel supports (stranded galvanized steel), breaking load 985 N
- One white slitting cord per group
- Outer sheath : PVC black markings : - metric scale

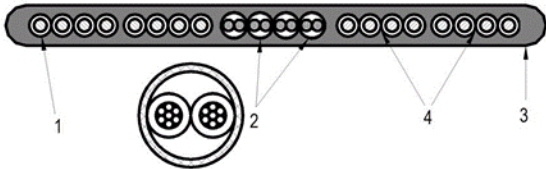

16 CORE + 4 TWISTED PAIR

Construction

- Conductor 0.75mm² (24x0.2) untinned, with PVC-insulation
- 4 x twisted pair x 1.20mm ϕ Screened-2x0.25 mm² (7x0.21 ϕ)
- Outer sheath : PVC black markings : - metric scale
- One white slitting cord per group

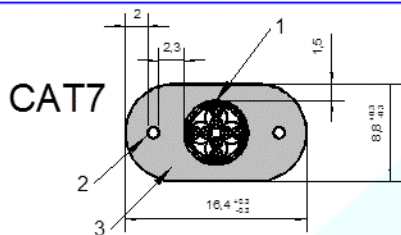


FLAT CABLE—CAT7 WITH STEEL ROPE

Construction

- Cable : CAT7 ϕ = 5.8
- Steel rope tinned ϕ = 1.0
- Sheath—See Table

Art No.	Sheath	Colour
10151804	Halogen Free	Black
60500827	PVC	Black


test voltage conductor / conductor 100V
conductor / screen 100V
Free clamping length max. 250MM
Cat. 7 flex cable operation temperature 0°C to +50°C

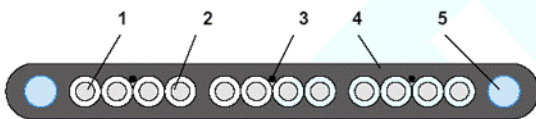

12~24 CORE X 0.75MM² WITH STEEL SUPPORT

Construction

- Conductor 0.75mm² (24x0.2) untinned
- Conductor with double PVC insulation Colour of core : Black with numbers + 1 core green/yellow
- Slitting cord in each group, white
- Outer sheath : PVC black markings : - metric scale
- Steel supports (stranded galvanized steel)

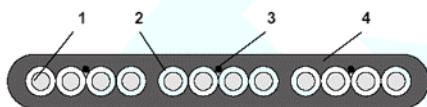

12~24 CORE X 0.75MM² WITHOUT SUPPORT

Construction


- Conductor 0.75mm² (24x0.2) untinned
- Conductor with double PVC insulation Colour of core : Black with numbers + 1 core green/yellow
- Slitting cord in each group, white
- Outer sheath : PVC black markings : - metric scale

Packagings

We can supply the flat travelling cables in specified pre-cut lengths or complete reels.


Delivery Service

Our normal delivery time is 1—2 working days depending on stock.

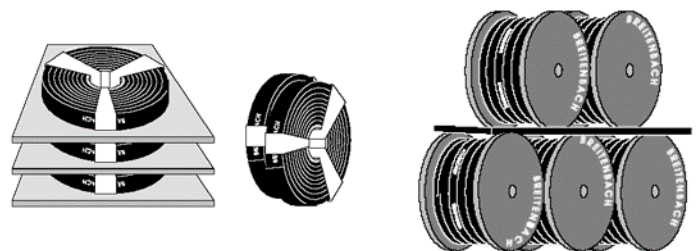

Pre-cut lengths

Complete Reels

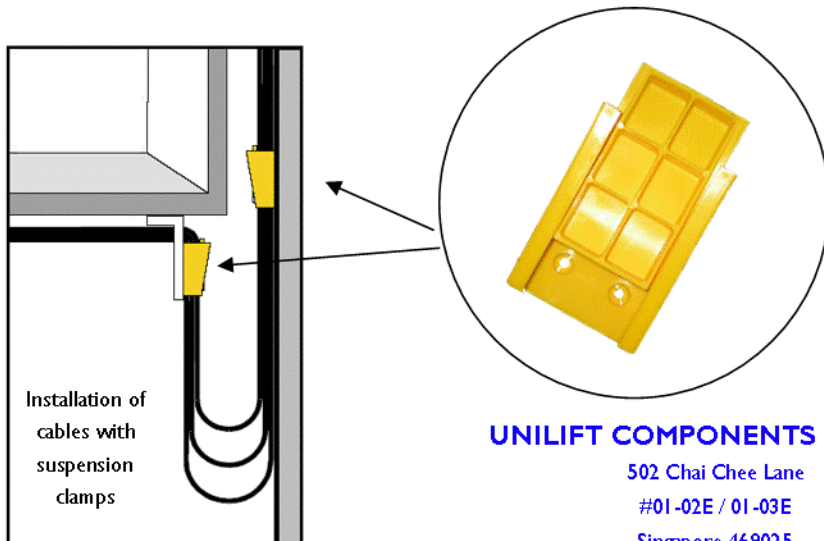

Travelling cable suspension clamp

Construction :
Polyamid clamps - 75mm

Recommendations :

- Max. 3 cables per clamp
- By more than 1 clamp, distance between each clamp min. 50mm
- By more than 1 cable, loop space between each cable min. 50mm

UNILIFT COMPONENTS PTE LTD

502 Chai Chee Lane

#01-02E / 01-03E

Singapore 469025

Tel : (65) 65423928 Fax : (65) 65421968

Email : enquiry@unilift.net

www.unilift.net